



Binder spreader BS 16000 PROFI

Fields of application:


For the uniform application of powdered binders, such as cement, lime, and fly ash or mixed binders for the improvement or compaction of soils.

Standard equipment

- ☒ Lorry adapter frame
- ☒ Dual sided compressed air filling
- ☒ 3 high precision rotary valves
- ☒ Weigh plate for controlled weighing
- ☒ Electronic part-width storage
- ☒ Electronically controlled rotary valve
- ☒ Travel speed recorded by radar

Optional equipment

- ☐ Side-mounted storage compartments with canvas
- ☐ Assembly on client vehicle
- ☐ Working width 2.70 (vehicle width 2.85)
- ☐ Diesel engine drive
- ☐ Dust bag

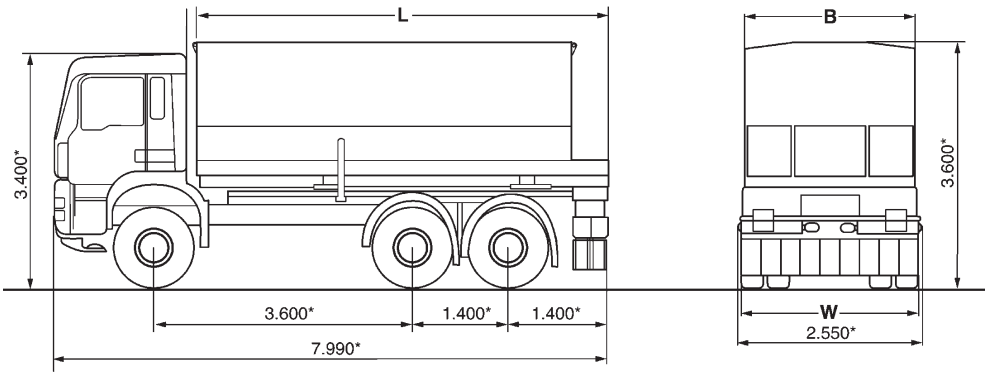

Dimensions in in mm	B	L	W
BS 16000 PROFI	2450	4595	2400

Technical Data	BOMAG BS 16000 PROFI	BOMAG BS 19000 PROFI
Type	LKW Aufbaustreuer	LKW Aufbaustreuer
Capacity..... m ³	16	
Theoretical yield ** l/m ²	50	
Working width mm	2400	
Number of rotary valves.....	3	
Weight - mounted..... kg	4890	

** Example for MAN lorry
** at working speed 2,4 km/h